

IOT BASED AGRICULTURE EQUIPMENT OPERATING AND MONITORING SYSTEMS

Dr. B. LEKSHMI SREE

Associate Professor Dept. Of Electrical and Electronics Engineering
Narsimha Reddy engineering college
Maisammaguda, Kompally, Secunderabad, Hyderabad, Telangana 500100
Email: dr.b.lekshmisree@nrcmec.org

ABSTRACT

Agriculture is the primary occupation in our country for ages. But now due to migration of people from rural to urban there is hindrance in agriculture. So to overcome this problem we go for smart agriculture techniques using IoT. This project includes various features like GPS based remote controlled monitoring, moisture & temperature sensing, intruders scaring, security, leaf wetness and proper irrigation facilities. It makes use of wireless sensor networks for noting the soil properties and environmental factors continuously. Various sensor nodes are deployed at different locations in the farm. Controlling these parameters are through any remote device or internet services and the operations are performed by interfacing sensors, Wi-Fi, camera with microcontroller. This concept is created as a product and given to the farmer's welfare.

Water is the important source in human life. Around 80 % to 90 % water used in agriculture field. As due to day by day growth in globalization and population water consumption is also increases. There is challenge in front of every country to reduce the farm water consumption and provide fresh and healthy food. Today automation is one of the important role in human life. The system is not only provides comfort but also reduce energy, efficiency and time saving. Whenever there is a change in temperature, humidity and current status of rain of the surroundings these sensors senses the change in temperature and humidity and gives an interrupt signal to the raspberry pi. Now a day the industries are using an automation and control machines which are high in cost and not suitable for using in a farm & garden field. So in this work we design a smart irrigation technology based on IOT using Raspberry pi. The system can be used to control the water motor automatically and can also monitor the growth of plant by using webcam. We can watch live streaming of farm on mobile phone using suitable application by using WiFi network. Raspberry pi is the main heart of the overall system.

1.INTRODUCTION

India is one of the largest freshwater user in the world, and our country uses large amount of fresh water than other country. There is a large amount of water used in agriculture field rather than domestic and industrial sector. 65% of total water is contributes as a groundwater. Today water has become one of the important source on the earth and most of used in the agriculture field. As the soil-moisture sensor and temperature sensor are placed in the root zone of the plants, the system can distributed this information through the wireless network. The raspberry pi is the heart of the system and the

webcam is interfaced with Raspberry pi via Wi-Fi Module. Python programming language is used for automation purpose. The system is a network of wireless sensors and a wireless base station which can be used to provide the sensors data to automate the irrigation system. The system can used the sensors such as soil moisture sensor and soil temperature sensor and also ultrasonic sensor. The raspberry pi model is programmed such that if the either soil moisture or temperature parameters cross a predefined threshold level, the irrigation system is automated, i.e. the relay connected to the raspberry pi will turn ON or OFF the motor.

This paper present an efficient, fairly cheap and easy automated irrigation system. This system once installed it has less maintenance cost and is easy to use. By using the webcam with suitable application on mobile phone we can easily online monitoring the actual situation of the field and sensors such as soil moisture and temperature are used to provide the information about changes occurs in the field. It is more advantageous than the traditional agriculture techniques


As the world is trending into new technologies and implementations it is a necessary goal to trend up in agriculture also. Many researches are done in the field of agriculture. Most projects signify the use of wireless sensor network collect data from different sensors deployed at various nodes and send it through the wireless protocol. The collected data provide the information about the various environmental factors. Monitoring the environmental factors is not the complete solution to increase the yield of crops. There are number of other factors that decrease the productivity to a greater extent. Hence automation must be implemented in agriculture to overcome these problems. So, in order to provide solution to all such problems, it is necessary to develop an integrated system which will take care of all factors affecting the productivity in every stage. But complete automation in agriculture is not achieved due to various issues. Though it is implemented in the research level it is not given to the farmers as a product to get benefitted from the resources. Hence this paper deals about developing smart agriculture using IoT and given to the farmers..

II.LITERATURE SURVEY

The existing method and one of the oldest ways in agriculture is the manual method of checking the parameters. In this method the farmers they themselves verify all the parameters and calculate the readings. [1]It focuses on developing devices and tools to manage, display and alert the users using the advantages of a

wireless sensor network system. [2]It aims at making agriculture smart using automation and IoT technologies. The highlighting features are smart GPS based remote controlled robot to perform tasks like weeding, spraying, moisture sensing, human detection and keeping vigilance. [3]The cloud computing devices that can create a whole computing system from sensors to tools that observe data from agricultural field images and from human actors on the ground and accurately feed the data into the repositories along with the location as GPS coordinates.[4]This idea proposes a novel methodology for smart farming by linking a smart sensing system and smart irrigator system through wireless communication technology.[5]It proposes a low cost and efficient wireless sensor network technique to acquire the soil moisture and temperature from various location of farm and as per the need of crop controller to take the decision whether the irrigation is enabled or not.[6]It proposes an idea about how automated irrigation system was developed to optimize water use for agriculturalcrops. In addition, a gateway unit handles sensor information.[7]The atmospheric conditions are monitored and controlled online by using Ethernet IEEE 802.3.The partial root zone drying process can be implemented to a maximum extent.[8]It is designed for IoT based monitoring system to analyze crop environment and the method to improve the efficiency of decision making by analyzing harvest statistics.[9]In this paper image processing is used as a tool to monitor the diseases on fruits during farming, right from plantation to harvesting. The variations are seen in color, texture and morphology. [10]In this paper, greenhouse is a building in which plants are grown in closed environment. It is used to maintain the optimal conditions of the environment, greenhouse management and data acquisition.

II.SYSTEMARCHITECTURE

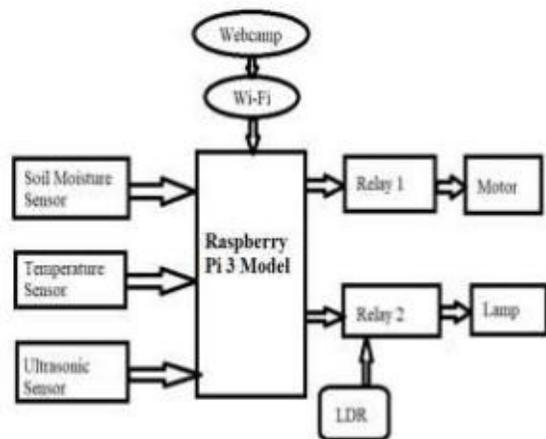

II. RELATED WORK:

After extensive research in the agricultural field, many researchers found that the agriculture area and its productivity are decreasing by the day. With the Use of different technology in the field of agriculture we can increase the production as well as reduce manual efforts. This paper shows the technology used in agriculture sector based on IOT and Raspberry Pi. ChandankumarSahu proposed a system on “A Low Cost Smart Irrigation Control System”. It includes a number of wireless sensors which are placed in different directions of the farm field. Each sensor is integrated with a wireless networking device and the data received by the “ATMEGA318” microcontroller which is on the “ARDUINO-UNO” development board. The Raspberry pi is used to send various types of data like text messages and images through internet communication to the microcontroller process [1]. SuprahaJadhv proposed, automated irrigation system using wireless sensor network and raspberry pi that control the activities of drip irrigation system efficiently [2]. Sebastian Hentzelt proposed a paper on the water distribution system and gave results to decompose the original nonlinear optimal control problem (OCP) [3]. Joauin Gutierrez attempted a paper that research automated

irrigation system using a wireless sensor network and GPRS module instead of the Raspberry pi [4]. Ms. DeweshvreeRane Proposed “Review paper based on Automatic Irrigation System Based on RF Module” it is based on the RF module, this device is used to transmit or received radio signal between two devices. It’s design is complex because of the sensitivity of radio circuits and the accuracy of the components [5]. Karan Kansara proposed “Sensor based automatic irrigation system with IoT”, this irrigation system is used a rain gun pipe, one end connected to the water pump and another to the root of plant. It doesn’t provide water as a natural rainfall like sprinkler and also it uses only soil moisture sensor [6]. G. Parameswaran proposed “Aurdino based smart irrigation system using Internet of Things”, the researcher has not used Raspberry pi instead the work is done using aurdino controller without use of soil moisture sensors [7].

IV.PROPOSEDSYSTEM

Farm monitoring system for farm application consists of wireless sensing devices that are placed in agricultural areas to gather data such as moisture, temperature, humidity and fire. The gathered information are communicated to Raspberry pi via Wi-Fi using Master Slave communication model. Raspberry pi, which acts as a master node, controls its devices or process known as slaves. This process consists of functions like storing data, collecting data from slaves, computing and integration of data. The raspberry pi can establish a Wi-Fi network and run the communication model that is used to collect data from sensors to raspberry pi and from pi to the server. The user alliance that is the web application based on IoT platform allows users to maintain agricultural data in actual time. The primary preferred standpoint of the proposed framework is that the cost of the setup progressively is low as raspberry-pi and other computerized sensors with web of things are utilized. The framework

can without much of a stretch conclusion the encompassing condition. The application of the proposed system come in the areas of agricultural fields, agricultural research stations, cultivation areas and nursery plants. Fig. 2. Represents the architectural representation of the farm monitoring system. The system setup shows how the sensors can be deployed in the agricultural field by taking a planter for example. The setup can be useful in any kind of the agriculture field and can get better yield..

SOFTWARE USED:

a)Python:

Python is an interpreted high-level programming language for general-purpose programming. Created by Guido van Rossum and first released in 1991, Python has a design philosophy that emphasizes code readability, and a syntax that allows programmers to express concepts in fewer lines of code,[25][26] notably using significant whitespace. It provides constructs that enable clear programming on both small and large scales.

b) ThingSpeak: ThingSpeak is an open source Internet of Things application and API to store and retrieve data from things using the HTTP protocol over the Internet or via a Local Area Network. ThingSpeak enables the creation of sensor logging applications, location tracking applications, and a social network of things with status updates. ThingSpeak was launched as a service in support of IoT applications.

WORKING PRINCIPLE:

As the Raspberry Pi is the heart of the system. This system contain webcam which is interfaced to Raspberry Pi via Wi- Fi module. The Raspberry Pi Model zero incorporates a number of enhancements and new features. This features of raspberry pi are improved power consumption, increased connectivity and greater IO which made this powerful, small and lightweight ARM based computer. The Raspberry Pi cannot directly drive the relay. It

has only zero volts or 3.3 V. It needs 12V to drive electromechanical relay. In that case it uses a driver circuit which provides 12V amplitude to drive the relay. Various sensors are connected to the Raspberry Pi board give a resistance variation at the output. This output signal is applied to the comparator and signal conditioning.

VI.CONCLUSION

The smart irrigation system is suitable and cost effective for advance water resources for agricultural production. The system would provide feedback control system which will monitor and control all the activities of plant growth and irrigation system efficiently. If rain gun sensor can be added so that when it rains there won't be floods. Rain water harvesting can be done and this harvested water can be used to irrigate fields. We can also include many more water quality sensors that affect the crops..

VII.REFERENCES

1. ChandankumarSahu, PramiteeBehera. 2015 A Low Cost Smart Irrigation Control System IEEE Sponsored 2nd International Conference on Electronics and Communication System (ICECS).
2. SuprabhaJadhav, ShaileshHambarde. 2013 Automated Irrigation System using Wireless Sensor Network and Raspberry pi, International Journal of science and research (IJSR).
3. Gutierrez, J. Francisco, J. Villa-Medina Nieto-Garibay, A., and Angel, P.G. 2013. Automated Irrigation System Using a Wireless Sensor Network and GPRS Module
- 4.Rane D, Indurkar P, and Khatri, D.M. 2015 Paper based on Automatic irrigation system on RF module In IJAICT Volume 1, Issue 9.
5. Kansara, K., Zaveri, V., Shah, S., Delwadkar, S., Jani, K. 2015 Sensor Based Automated Irrigation System with IOT In IJCSIT, Vol. 6.
6. Parameswaran, G., Sivaprasath, K. 2016 Arduino Based Smart Drip Irrigation System Using Internet Of Things In: IJESC, Volume 6 Issue No. 5.

- [8] P. C. Tetlock, "Giving content to investor sentiment: The role of media in the stock market," *J. Finance*, vol. 62, no. 3, pp. 1139–1168, 2007.
- [9] S. R. Das and M. Y. Chen, "Yahoo! for Amazon: Sentiment extraction from small talk on the web," *Manag. Sci.*, vol. 53, no. 9, pp. 1375–1388, 2007.
- [10] R. P. Schumaker and H. Chen, "Textual analysis of stock market prediction using breaking financial news: The AZFin text system," *ACM Trans. Inf. Syst.*, vol. 27, no. 2, pp. 12:1–12:19, 2009.
- [11] J. Bollen, H. Mao, and X. Zeng, "Twitter mood predicts the stock market," *J. Comput. Sci.*, vol. 2, no. 1, pp. 1–8, 2011.
- [12] Q. Li, Y. Chen, L. L. Jiang, P. Li, and H. Chen, "A tensor-based information framework for predicting the stock market," *ACM Trans. Inf. Syst.*, vol. 34, no. 2, pp. 11:1–11:30, 2016.
- [13] S. J. Gray, G. K. Meek, and C. B. Roberts, "International capital market pressures and voluntary annual report disclosures by US and UK multinationals," *J. Int. Financ. Manag. Account.*, vol. 6, no. 1, pp. 43–68, 1995.
- [14] W. S. Chan, "Stock price reaction to news and no-news: Drift and reversal after headlines," *J. Financ. Econ.*, vol. 70, no. 2, pp. 223–260, 2003.
- [15] Q. Li, T. Wang, P. Li, L. Liu, Q. Gong, and Y. Chen, "The effect of news and public mood on stock movements," *Inf. Sci.*, vol. 278, pp. 826–840, 2014.